


DEHUMIDIFIER



The most powerful performance certified by TÜV Rheinland
- Designed with HP Booster technology

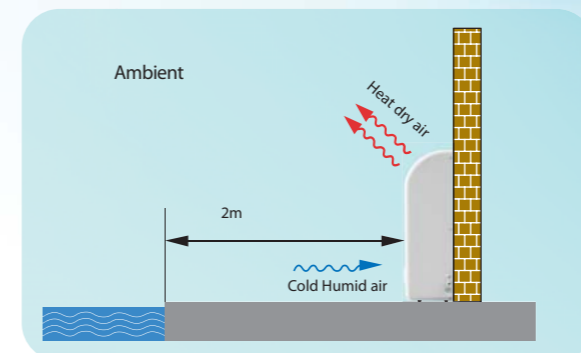

Features

- HP-BOOSTER technology
- R410a refrigerant
- Floor and wall mounted installation
- Plastic casing
- Optional Electric Heating
- Quiet running

Application: Pool, Cellar, Museum, Gym, all the locals that needs dehumidification.



Model	DH60	DH90	DH120
Capacity in (l/h) (Air 30°C, RH 70%)*	2.5	3.9	5.0
Heat Recovered (kW)	2.8	4.2	5.5
Electric Heating Optional (kW)	3	3	3
Rated Power (kW)	1	1.7	2
Rated Current (A)	4.58	7.83	9.15
Power supply	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz
Operating air temperature (°C)	5~38	5~38	5~38
Sound Power dB(A)	61.5	62.8	62.8
Sound pressure 5m dB(A)	39.5	40.8	40.8
Air flow (m³/h)	800	1000	1200
Net Dimension (mm)	855x242x848	1155x280x848	1155x280x848
Net Weight / Gross Weight (Kgs)	52/68	70/86	75/91
Loading Capacity 20FT/40HQ	82/174	58/120	58/120

* Above data is subject to modification without notice.
* These datas are certified by TÜV Rheinland according to EN810:1997.

